


# Chev-Ease

## *Installation Instructions*

Clean diamond plate surface with soap and water. Remove any remaining tar, grease or anything else remaining on the surface with an appropriate cleaner. After cleaning, make sure surface is completely dry.

Mark the upper center point of the surface to be covered with Chev-Ease.

Mark and place 1st diamond here

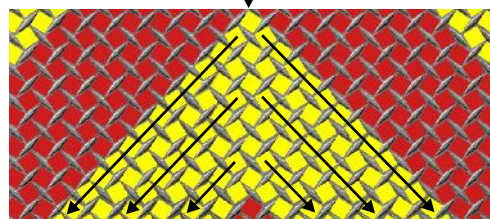

Place a single Chev-Ease diamond sticker at the upper center point just marked.

Attach strips of Chev-Ease diamonds of the same color down and out from the single starter diamond (see illustration above) and continue until stripe is complete. Stripes should be 6 diamonds wide. Repeat process going down and out the opposite direction until that stripe is complete.

Continue laying strips, 6 diamonds wide, alternating colors, until complete. It may be necessary to use smaller strips, or even place diamonds on individually when going around objects. ***Important:*** *Make sure to press each diamond sticker down completely, if this is not done, the edges of the diamond may peel back and eventually cause it to break free of the diamond plate surface.*

Should you need to remove any Chev-Ease diamonds, you can use a heat gun or hair dryer to soften the adhesive and peel the diamond off. Be sure to remove all adhesive before placing another diamond in the same spot. You should be able to rub the surface with your finger to remove the adhesive, but if you need to use a cleaner, be sure not to let it contact other diamond stickers.